

Luminous

Aluminum LT-LU-05

SPECIFICATIONS

Contents

50% post-consumer recycled polyester
32% polypropylene
18% pre-consumer recycled polyester

Weight

15.0 ± 1.0 oz/lin. yd.

Width

66"

Repeat

n/a vertical, n/a horizontal

Backing

Acrylic back-coating

Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

Performance



Breaking Strength (ASTM D5034)

280 lbf min. warp and 180 lbf min. fill

Tear (ASTM D2261)

40 lbf min. warp and 60 lbf min. fill

Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hr.

Colorfastness to crocking (AATCC 8)

Grade 4 min. dry and Grade 3 min. wet


Fire Rating

Passes ASTM-E84

Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Proudly woven in North America supporting our local communities.

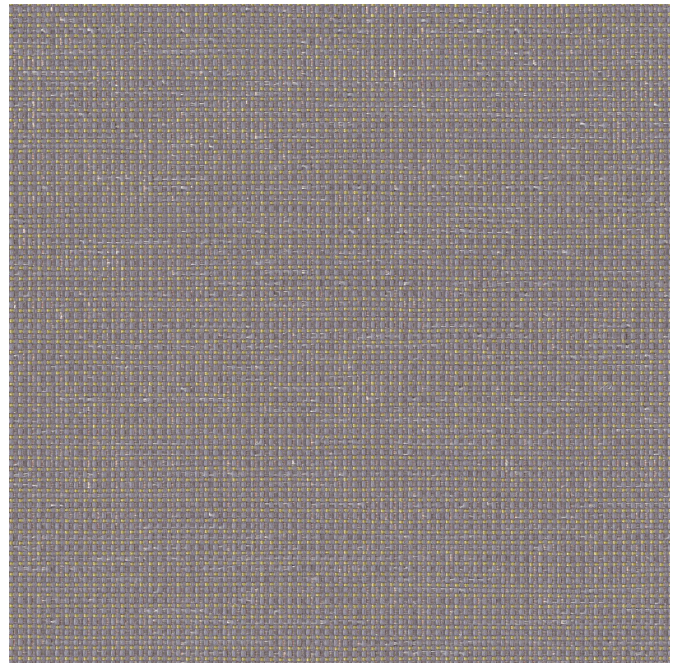

LUCID
textiles

www.lucidtextiles.com