

Allure

Iron LU-AL-005

SPECIFICATIONS

Contents

Vinyl | Urethane Topcoat

Weight

30 oz.

Width

54"

Roll Size

30 yd.

Finish

PERMABLOK[®]
ADVANCED VINYL PROTECTION

Backing

Hi-Loft

Cleaning Code

See approved cleaners document.

Performance



Superior Abrasion

100,000 cycles | Wyzenbeek # 10 Cotton Duck

UV Stabilized Pigments:

Xenotest: AATCC

Blue Wool | 1,000 hrs

Cold Crack

-10°F

Exterior Approved

Fire Rating

California T.B. 117-2013

NFPA 260- Cover Fabric - Class I


UFAC Fabric – Class I

Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots.

Prop 65 Compliant

AB2998 Compliant

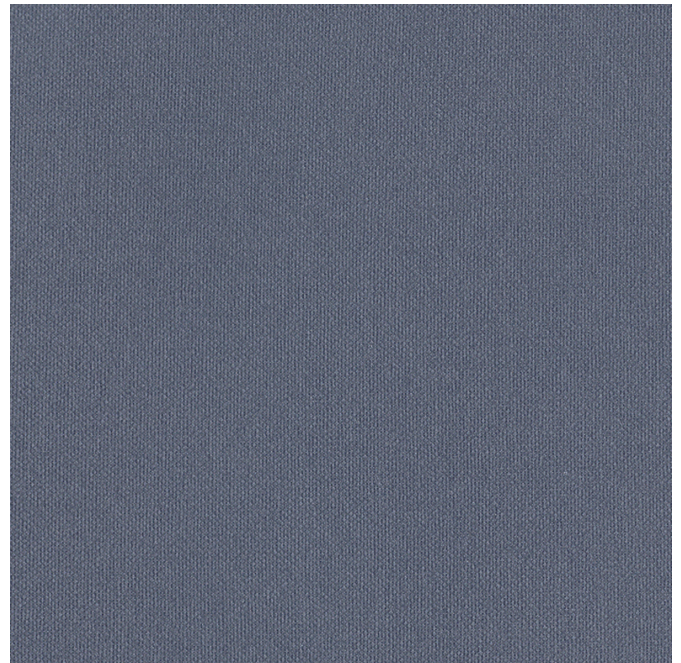

LUCID
Upholstery

www.lucidtextiles.com