Allure

Soy LU-AL-019 SPECIFICATIONS

Contents

Vinyl | Urethane Topcoat

Weight 30 oz.

Width 54"

Roll Size 30 yd.

Finish

PERMABLOK®

Backing Hi-Loft

Cleaning Code
See approved cleaners document.

Performance



Superior Abrasion 100,000 cycles | Wyzenbeek # 10 Cotton Duck

UV Stabilized Pigments:

Xenotest: AATCC

Blue Wool | 1,000 hrs

Cold Crack -10°F

Exterior Approved


Fire Rating
California T.B. 117-2013
NFPA 260- Cover Fabric - Class I
UFAC Fabric - Class I

Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may very between dye lots.

Prop 65 Compliant

AB2998 Compliant

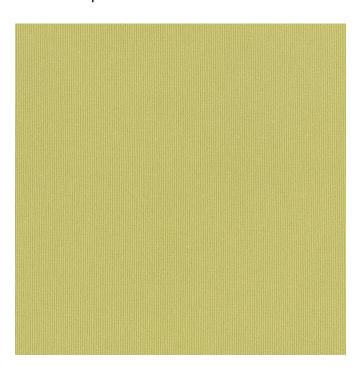



www.lucidtextiles.com