Crossroad

Clay LU-CR-015

SPECIFICATIONS

Contents Vinyl | Urethane Topcoat

Weight 27 oz.

Width 54"

Roll Size 30 yd.

Finish Permablok

Backing Hi-Loft2

Cleaning Code See approved cleaners document.

Performance



Superior Abrasion: 75,000 Cycles Wyzenbeek # 10 Cotton Duck

UV Stabilized Pigments: QUV: ASTM Grey Scale | 650 Cold Crack

-10°F

Exterior Approved


Fire Rating California T.B. 117-2013 NFPA 260- Cover Fabric - Class I UFAC Fabric – Class I


Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may very between dye lots.

Prop 65 Compliant

AB2998 Compliant

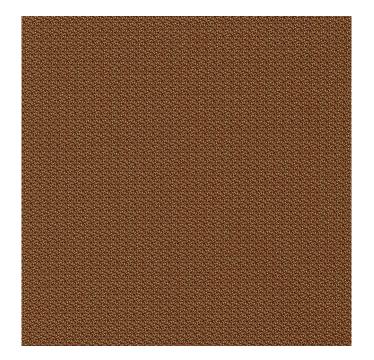



www.lucidtextiles.com