

Milos

Anchor LU-MS-016

SPECIFICATIONS

Contents

Vinyl | Urethane Topcoat

Weight

29 oz.

Width

54"

Roll Size

30 yd.

Finish

PERMAGUARD®
SUPERIOR STAIN RESISTANCE

Backing

Hi-Loft

Cleaning Code

See approved cleaners document.

Performance



Superior Abrasion: 100,000 Cycles

Wyzenbeek # 10 Cotton Duck

UV Stabilized Pigments:

QUV:ASTM Grey Scale | 650 Hrs

Cold Crack

-10°F

Exterior Approved

Fire Rating

California T.B. 117-2013

FMVSS 302


IMO FTP 2010 Code MSC.307(88) Part 8:3.1 & 3.2

NFPA 260- Cover Fabric - Class I

UFAC Fabric – Class I

Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots.

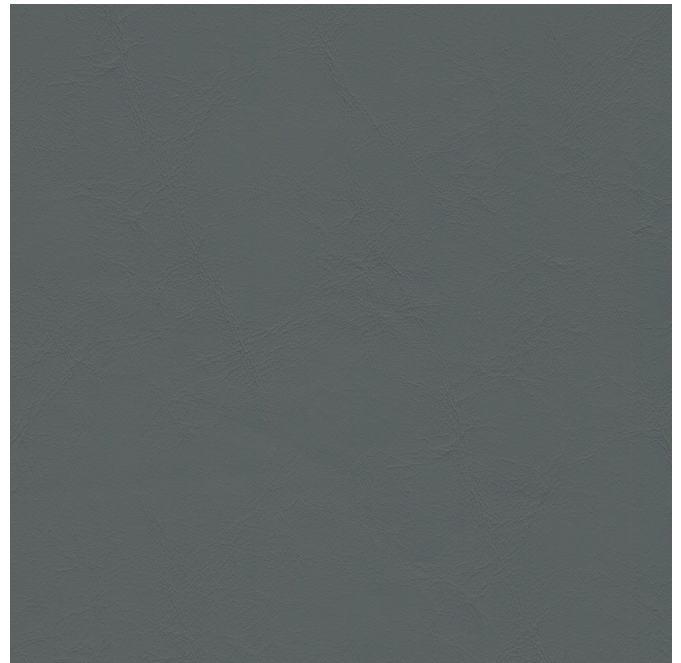

LUCID
Upholstery

www.lucidtextiles.com