

# Detail

Pecan LT-DE-10

## SPECIFICATIONS

### Contents

32% pre-consumer recycled polyester  
68% post-consumer recycled polyester

### Weight

13.5 ± 1.0 oz/lin. yd.

### Width

66"

### Repeat

0.125" vertical, 0.25" horizontal

### Backing

Acrylic back-coating

### Cleaning Code

Standard Care Label W-S. Clean with water based cleaning agents, foam or pure, water free solvents. Vacuuming or light brushing is recommended to prevent dust and soil buildup.

### Performance



### Breaking Strength (ASTM D5034)

280 lbf min. warp and 110 lbf min. fill

### Tear (ASTM D2261)

30 lbf min. warp and 25 lbf min. fill

### Colorfastness to light (AATCC 16.3 Option 3)

Grade 4 min. at 40 hr.

### Colorfastness to crocking (AATCC 8)

Grade 4 min. dry and Grade 3 min. wet


### Fire Rating

Passes ASTM-E84

## Miscellaneous

Every effort has been made to ensure color accuracy of the digital images, however, please order a sample before specification. Application testing of this product is recommended. Colors may vary between dye lots. This is a directional fabric.

Proudly woven in North America supporting our local communities.

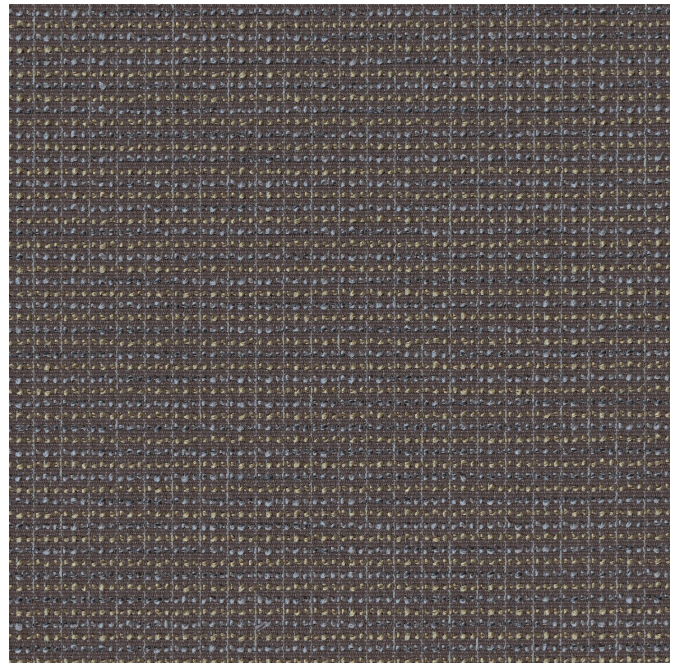

**LUCID**  
textiles

[www.lucidtextiles.com](http://www.lucidtextiles.com)